

WATER MAIN CLEANING, LINING AND REPLACEMENT PROJECT Foxhall Village

OVERVIEW

As part of its Capital Improvement Program, DC Water is replacing existing 12-inch and smaller cast iron water mains in various locations throughout the city. These efforts will help improve water quality and system reliability, increase water pressure in some areas, and maintain adequate flows throughout the system. Work will occur on Foxhall Road, 44th Street, Volta Place, Q Street, and P Street, NW (see back page for construction location map).

SCOPE OF WORK

- Pre-construction activities will include (1) replacement of valves where needed; (2) layout of temporary water service piping; (3) utility markings; and (4) preconstruction site survey
- Cleaning and lining of approximately 5,000 linear feet of 8-inch water mains
- Installation of approximately 1,500 linear feet of 12 -inch, 8 -inch, 6-inch and 3 -inch water mains
- Replacement of service lines (lead and/or other) in public space, as needed
- Replacement of fire hydrants and valves
- Upon completion of construction, chlorination of water mains, water sample testing, internal pipe inspections, reconnection and recharging of mains, and site restoration will take place


SCHEDULE

- Construction start: February 2018
- Construction completion: August 2018
- Normal work hours: 8 am – 4 pm, Monday through Friday, Saturday possibly
- Contractor may work at night or on weekends, dependent upon additional construction activities or due to inclement weather

IMPORTANT INFORMATION

- The removal and pruning of public space trees may be necessary and will be minimized wherever possible.
- During this construction project, there will be installation of temporary bypass piping for some affected homes in the area. Specifically, as portions of water mains are systematically taken out of service, homes served by these mains will be temporarily connected to an above ground pipe in order to maintain water services throughout the work.
- Temporary bypass piping will be covered with asphalt and temporary ramping. Please use extra caution when walking, driving, biking, or running in the construction project area and over any temporary piping structures.
- If a planned temporary water service shut-off is necessary, affected residents will be notified 48 hours in advance. Service interruptions will be minimal.
- Construction may cause temporary discolored water or low water pressure. If you experience discolored water, flush cold water taps for 15 minutes. If water does not clear, contact the DC Water Drinking Water Division or 24-hr Emergency/Command Center.

WATER MAIN CLEANING, LINING AND REPLACEMENT PROJECT Foxhall Village

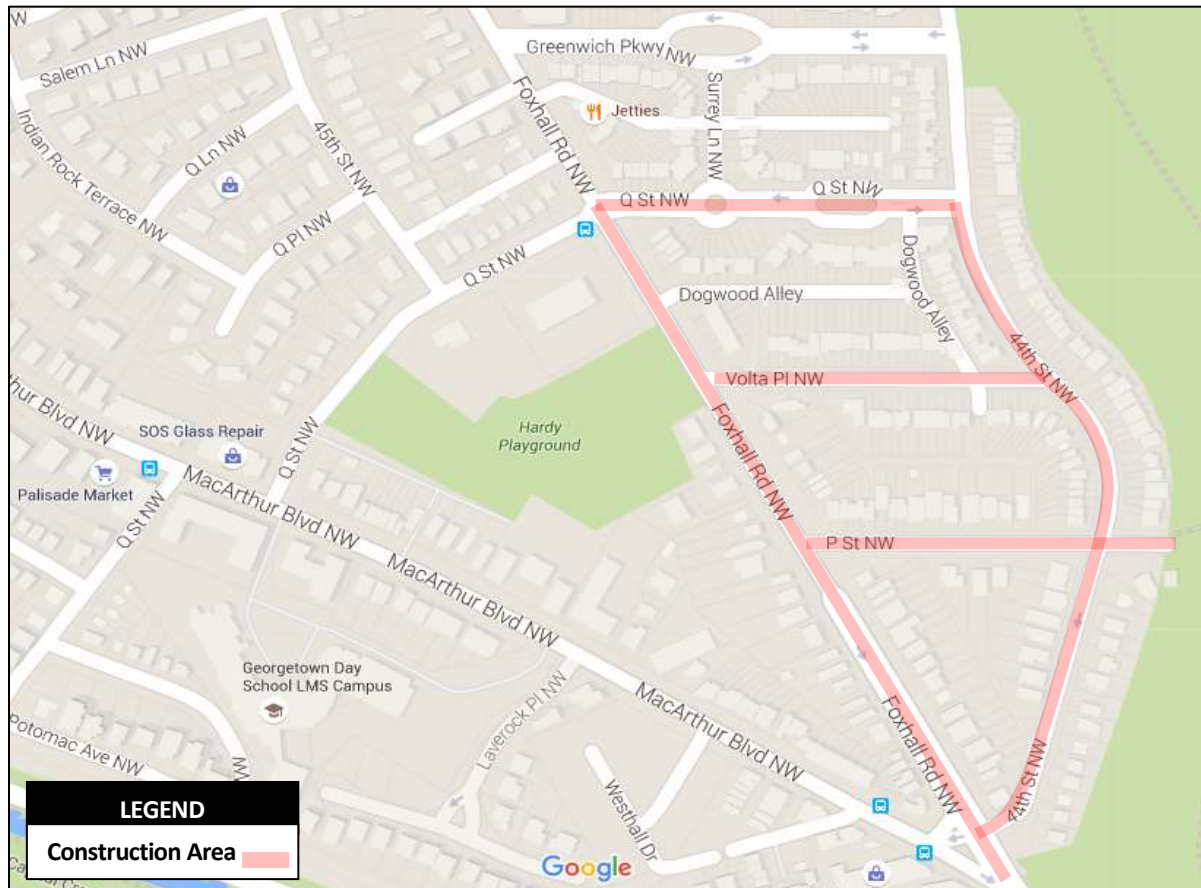

TRAFFIC PLANS

- Flagging operations will be used daily to maintain traffic. Lane closures may be required in accordance with approved traffic plans by the District Department of Transportation (DDOT).
- Notifications regarding “No-Parking” zones will be posted 72 hours prior to construction, in certain areas in and around the job site as required by DDOT.

PARTNERS

DC Water is currently working closely with DDOT to ensure minimal disruption during this project. Regular updates will also be provided to the affected Advisory Neighborhood Commissions.

FOR MORE INFORMATION, PLEASE CONTACT:

DC Water Project Manager: Nyika Roberson-Ramos (202) 787-7029

DC Water Project Contractor: J. Fletcher Creamer and Son, Inc. – Patrick Shannon (609) 481-3329

DC Water Drinking Water Division: (202) 612-3440

DC Water 24-hr Emergency/Command Center: (202) 612-3400

DC Water Office of External Affairs: (202) 787-2200

Email: nyika.roberson-ramos@dcwater.com